

APCO ASV AIR/VACUUM SEWAGE AIR VALVES AND DUAL BODY COMBINATION AIR VALVES

(BODY STYLES 401 & 401C)

ASV Air/Vacuum Valves Prevent Vacuum Conditions

APCO ASV-401 Air/Vacuum Sewage Air Valves are specifically designed for operation on sewage and waste media. Air/Vacuum Valves vent large volumes of air when the sewage line is filled and allow air to re-enter when draining to prevent vacuum or column separation from occurring.

Sewage Air/Vacuum Valves utilize two floats, each connected to a common stem which is guided through a bushing.

The upper float shuts off instantaneously against the seat, due to the impact zone and lifting force of the much larger concave bottom float, as sewage media enters the valve body. Once closed and pressurized, the Sewage Air/Vacuum Valve will not open to release air. It will open under negative pressure, allowing air to re-enter and prevent vacuum from forming in the line.


Dual Body Combination Sewage Air Valves

The ASV-401C Air/Vacuum Valve has an independent, side-connected Air Release Valve. The ASV-401C provides dual functions: venting large volumes of air through the large orifice and releasing small pockets of air through the small orifice air release valve.

The Dual Body Combination Sewage Air Valve automatically releases collected pockets of air through the small orifice automatically while pressurized. Should a vacuum develop in the force main, both orifices open to permit large volumes of air to re-enter and break the vacuum.



Body Style 401
1-14" (25-350mm)

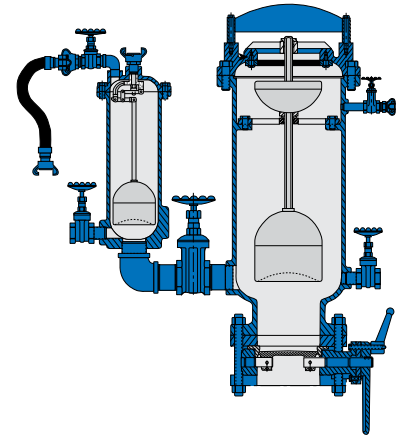

Body Style 401C
1-14" (25-350mm)

The large orifice air valve has an upper float and a lower concave float. The valve maintains an air gap between the concave bottom float and upper shut-off float.

The small orifice air valve has a compound lever mechanism with a long float stem and stainless steel float. The elongated body maintains an air gap between the float and the mechanism.


The air gap prevents waste solids from clogging the upper shut-off float of the large orifice and the lever mechanism of the small orifice valve.

Stainless Steel Parts Prevent Corrosion

The float, venting mechanism, plug and seat are constructed of 316 stainless steel as standard to provide both corrosion resistance and trouble-free performance.

Concave Float

The concave float is designed for optimum performance and reliability. ASC Combination Sewage Air Valves are shut off drop tight to eliminate spills or spurts before shutting off. The concave float has a unique impact zone which is extremely sensitive to sewage media entering the Sewage Air Valve. The impact zone causes instantaneous and upward movement of the float to shut-off the discharge orifice as soon as media contacts the float. No spilling or spurting occurs even with low pressure (below 20 psi, 138 kpa).

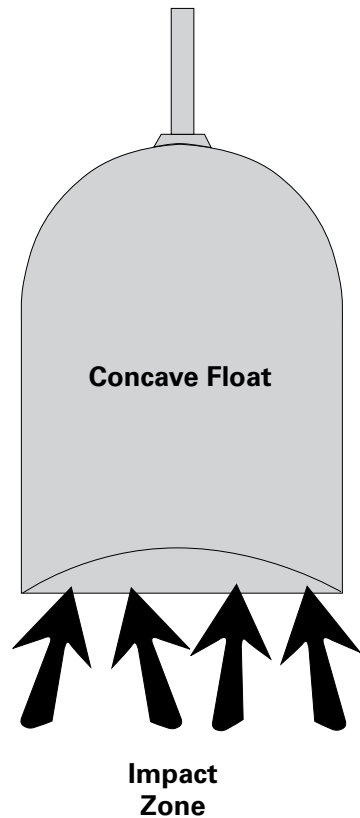

NBR Seat Provides Tight Shutoff

The standard Acrylonitrile-Butadiene (NBR) seat is fastened to the valve cover to prevent distortion and provide drop-tight shut-off. Optional seat materials are EPDM (Terpolymer of Ethylene Propylene & A Diene) and FKM (Fluoro Rubber).

Compact Height

The height of the APCO Sewage Air Release Valve has been optimized to provide the best separation from media, while maintaining compact dimensions to minimize the need for deeper pipeline trenches and bigger valve vaults, saving costs.

Accessories

Backflush Kit (BFK)

The Backflush Kit is recommended for periodic cleaning of grease and scum from the Sewage Air Valve. The Backflush Kit is a separate item that includes two brass shut-off valves, 316 stainless steel piping, and 5 feet of hose with galvanized steel quick disconnect couplings. Contact DeZURIK if extra hose lengths are required. Maximum pressure of Back-Flush Kit is 200 psi. An isolation valve is required on the inlet port to isolate the valve while performing the back-flushing operation, but is not included. Contact DeZURIK for recommendations.


To order as part of a complete valve, add BFK to the valve order code.

Ordering Example:
ASV,3,401,T1,DI,125,NBR-S2-S2*BFK

Order as a separate item by giving order code from table.

Order Code	Description
ACC*BFK-ASCASV	Backflush Kit for ASV-401 Valves
ACC*BFK-ASV401C	Backflush Kit for ASV-401C Valves

Ordering Example:
ACC*BFK-ASCASV

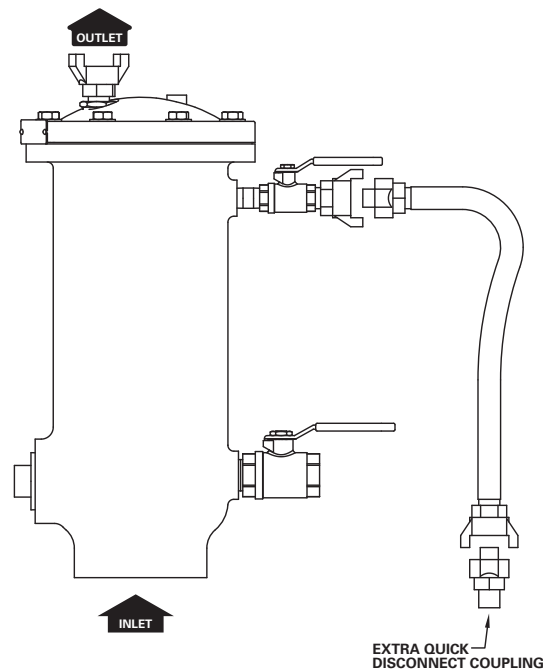

Mushroom Cap (MRC)


The Mushroom Cap prevents foreign debris from entering the valve outlet while providing wide openings for free expulsion of air. Available on valve sizes 1-3". To order as part of a complete valve, add MRC to order code.

Ordering Example:

ASV,3,401,T1,DI,125,NBR-S2-S2*MRC

To order as a separate item, give order code from the table below.

Outlet Size	Body Material	
	DI or CS	S2
1" NPT	ACC*MRC-1	ACC*MRCFB-1
2" NPT	ACC*MRC-2	ACC*MRCFB-2
3" NPT	ACC*MRC-3	ACC*MRCFB-3

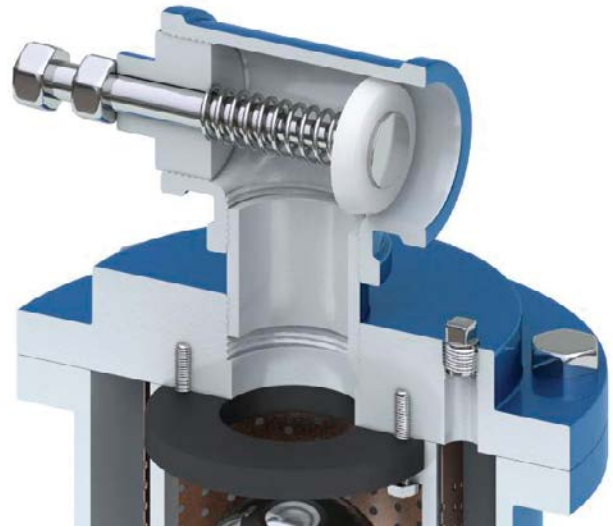

Double Acting Throttling Device (DAT)

The APCO Double Acting Throttling Device (DAT) is designed to regulate and restrict air venting on the discharge orifice of the ASC Combination Air Valve. The DAT features an exclusive throttling air-out/full flow air-in design. On pump start, the device establishes a pressure load on the rising column of media to eliminate shock to the pump, controls and check valve. On pump stop, the DAT device automatically opens to allow full line, unrestricted air reentry to prevent a vacuum and water column separation in the pump.

The DAT has a fusion coated epoxy coating. It can be ordered as part of a complete valve, or as a separate item. The DAT is not a stand-alone device and cannot be installed directly to the pipeline; it must be installed in the outlet port (top) of the Air/Vacuum Valve.

To order as part of a complete valve, add DAT to the valve order code.

Ordering Example:

ASV,3,401,T1,DI,125,NBR-S2-S2*DAT

To order as a separate item, give order code from the table below.



Valve Size	Body Material	
	DI or CS	S2
1.2" 25mm	ACC*DAT-1.2	ACC*DATFB-1.2
2" 50mm	ACC*DAT-2	ACC*DATFB-2
3" 80mm	ACC*DAT-3	ACC*DATFB-3
4" 100mm	ACC*DAT-4	ACC*DATFB-4
6" 150mm	ACC*DAT-6	ACC*DATFB-6
8" 200mm	ACC*DAT-8	ACC*DATFB-8

Materials of Construction

Item	Description	Material
A01	Body	Ductile Iron, ASTM A536
A02	Cover	316 Stainless Steel, ASTM A351/A743 CF-8M
A03	Cover Gasket	Cell Cork Fiber
A04	Cover Bolts	Zinc-Plated Carbon Steel
A06	Seat	Acrylonitrile-Butadiene (NBR) Terpolymer of Ethylene Propylene & A Diene (EPDM) Fluoro Rubber (FKM)
A05	Guide Plate	316 Stainless Steel
A14	Upper Float	316 Stainless Steel
A15	Lower Float	316 Stainless Steel
A16	Seat Retaining Screw	316 Stainless Steel
A21	Lock Washer	18-8 Stainless Steel
A24	Baffle	316 Stainless Steel
A26	Lower Guide Bushing	316 Stainless Steel
A28	Hood	Steel
A29	Hood Screws	Carbon Steel
A33	Float Stem	316 Stainless Steel
A34	Baffle/Guide Plate Screw	316 Stainless Steel
A38	Float Set Screw	316 Stainless Steel
A40	Bumper	Acrylonitrile-Butadiene (NBR) Terpolymer of Ethylene Propylene & A Diene (EPDM) Fluoro Rubber (FKM)
A41	Float Guide	316 Stainless Steel
A43	Upper Guide Bushing	316 Stainless Steel
A44	1/2" NPT Pipe Plug	Steel
A45	1" NPT Pipe Plug	Iron
A46	2" NPT Pipe Plug	Iron
A50	Inlet Nipple	Steel
A51	Inlet Flange	Steel
A54	Outlet Nipple	Steel
A55	Outlet Flange	Steel
A58	Bug Screen	304/316 Stainless Steel
A59	Cover Washers*	Carbon Steel
A60	Baffle/Guide Plate Washers*	316 Stainless Steel
A61	Hood Washers*	316 Stainless Steel

*Only provided on valves that either have fusion bonded epoxy or interior and exterior coating specified.

For Dual Body Combination Valves, refer to Bulletin 400-1 for Materials of Construction for the Air Release Valve.

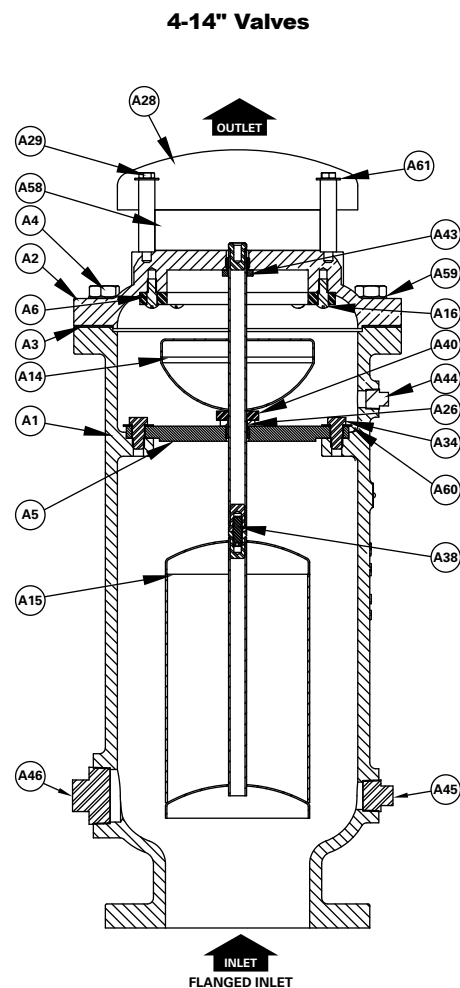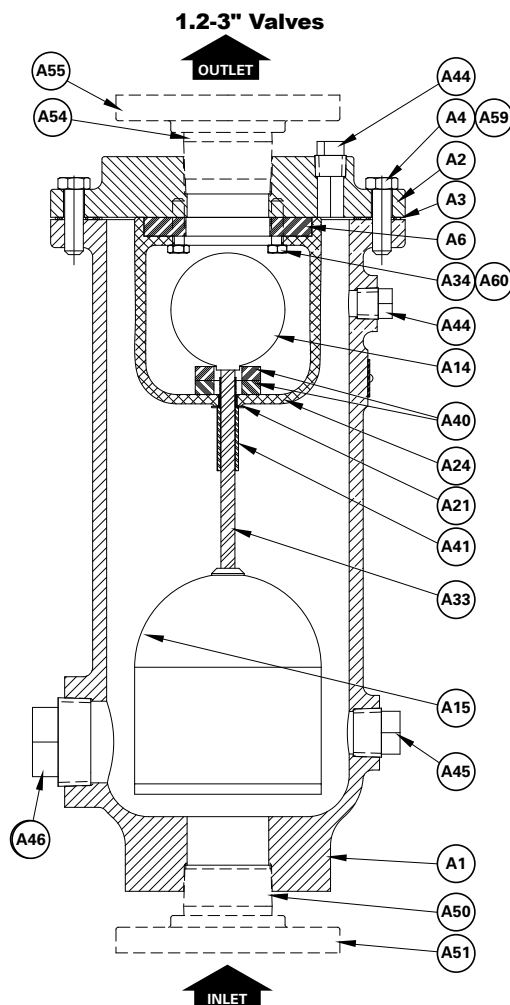

Valve Selection

Temperature Rating

All valves are rated to a maximum temperature of at least 250° F (121° C).

Contact application engineering if the valve is required to operate above this temperature.

Pressure Rating

APCO ASV Sewage Air/Vacuum Valves are rated for 150 psi (1035 kPa)

Valve and Backflush Kit Weights


Valve Size	Valve Only	With Backflush Kit
1"	41	55
25mm	19	25
2"	85	115
50mm	39	52
3"	85	118
80mm	39	54
4"	130	200
100mm	59	91
6"	190	290
150mm	86	132
8"	310	430
200mm	141	195
10"	600	800
250mm	272	363
12"	750	980
300mm	340	445
14"	950	1230
350mm	431	558

Lbs
Kg


Performance Graphs For Air/Vacuum Valve

Graphs show air inflow/outflow through valve in standard cubic feet of free air per second (scfs). Curves shown are actual flow capacities at 14.7 psi barometric pressure and 70°F temperature based on actual test. These figures are not merely flow capacities across the orifice, but flow capacities across the entire valve. In the test set-up, air approach velocity is negligible, therefore actual flow capacity exceeds the values shown on chart.

Inflow

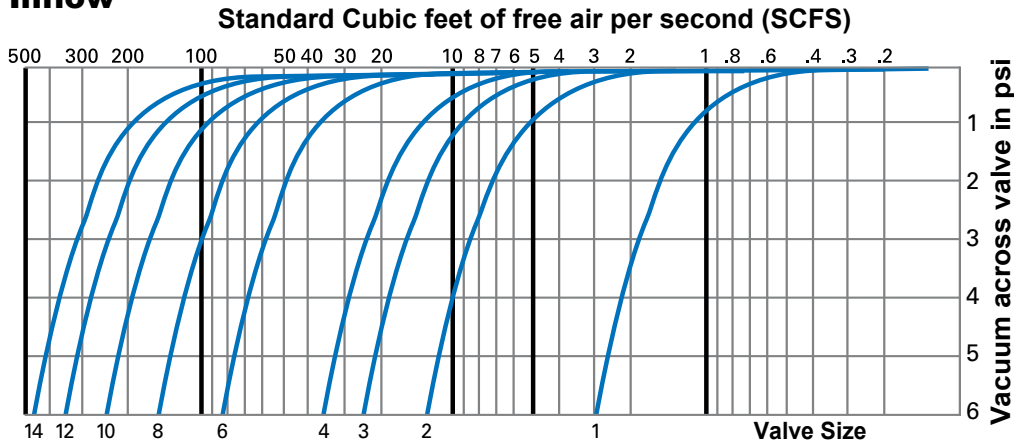


Outflow

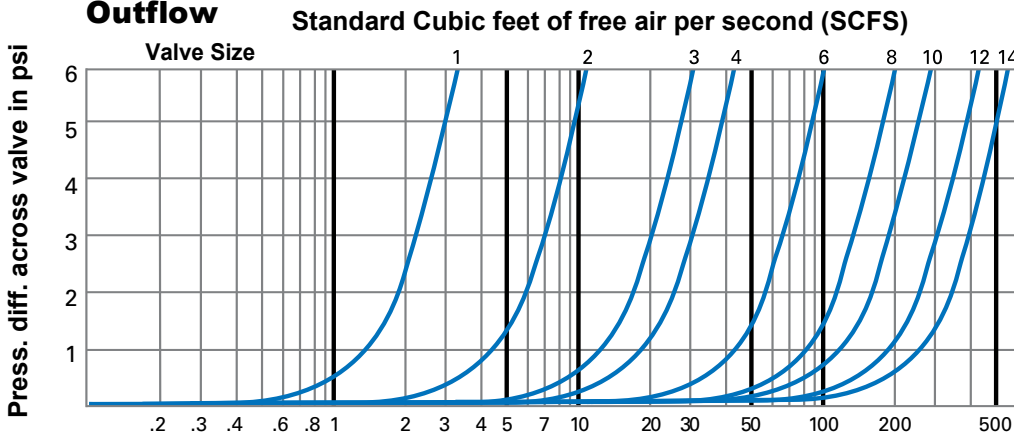

Venting Capacity Graph for Dual Body Combination Air Valves

Venting Capacity Graph for Air Release Valves

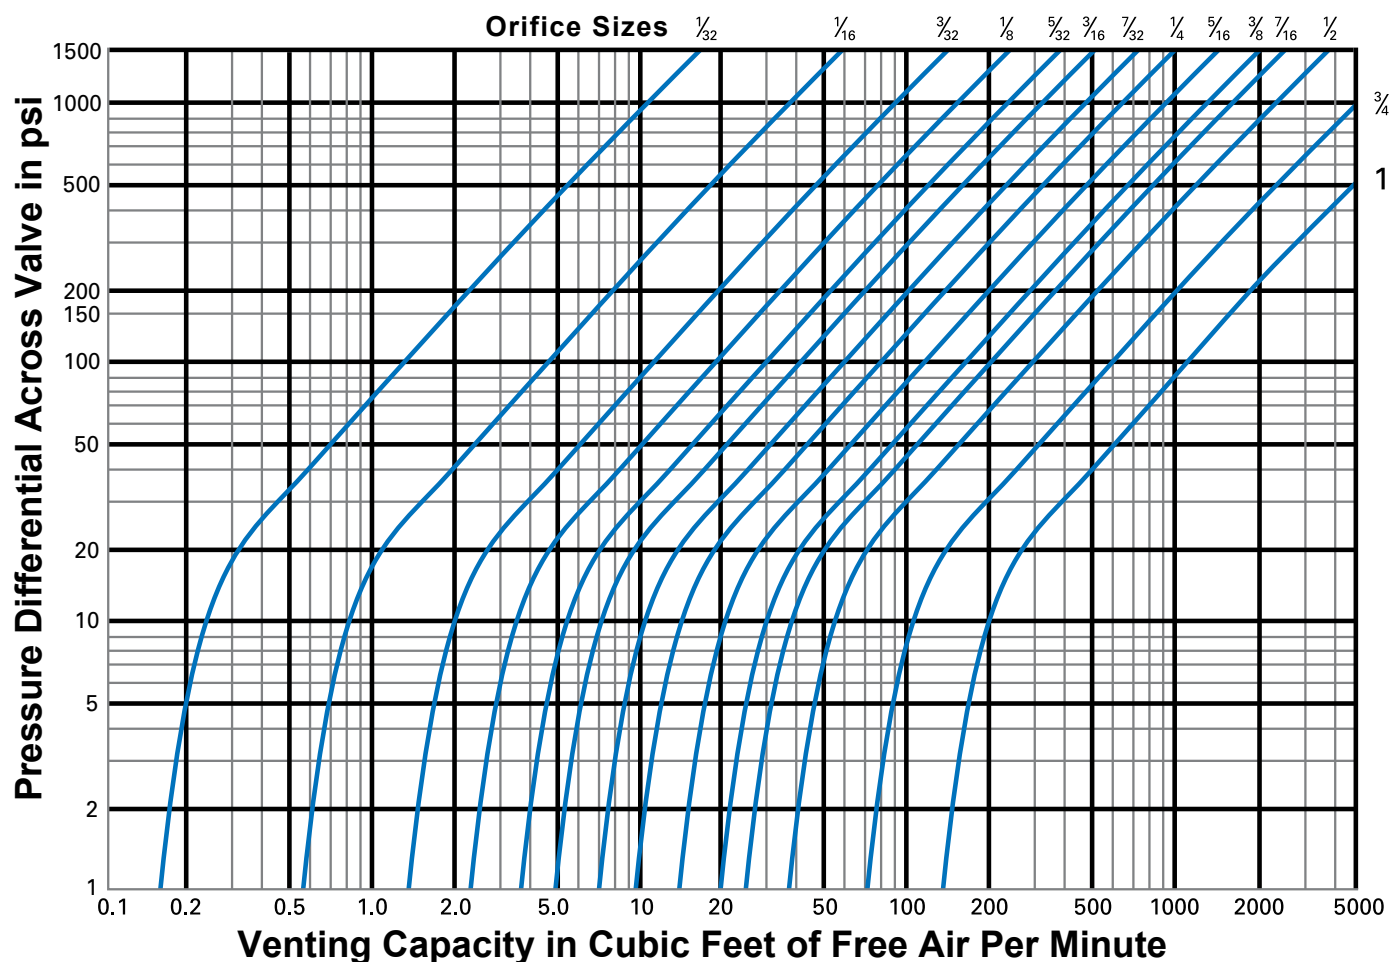

Note: Limiting Factor for Working Pressure is lowest pressure rating of end connection or orifice size.

Pressure Ratings (ambient temperature) and Venting Capacity

Limiting factory for Working pressure is the lowest pressure rating of the end connection, valve rated pressure and orifice pressure rating.

Body Style 401C

Body Style	Valve Size	Body Material	End Connection	Orifice Code	Orifice Diameter	Minimum Rated Pressure (psi)	Maximum Rated Pressure (psi)	Venting Capacity (CFFAM)
400	1-4"	DI	T1 & F1N	L516	5/16"	3	15	25
				R516	5/16"	11	50	65
				R14	1/4"	11	75	65
				R316	3/16"	11	150	60
	6-14"	DI*	T1	R532	5/32"	11	300	75
			F1N	R532	5/32"	11	250*	65
450	2-4"	DI	T1 & F1N	R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65
	6-14"	DI*	F1	R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65
				R532	5/32"	11	250*	65

*Valve maximum rated pressure at ambient temperature with a flanged inlet for Carbon Steel Valves is 285 psi; stainless steel valves is 275 psi.

Ordering

Orders must specify quantity and order code identification, in proper sequence, as shown.

Valve Style

Give valve style code as follows:

ASV = Sewage Air/Vacuum Valves

Valve Size

Give valve size code as follows:

1.2	=	1"	25mm	8	=	8"	200mm
2	=	2"	50mm	10	=	10"	250mm
3	=	3"	80mm	12	=	12"	300mm
4	=	4"	100mm	14	=	14"	350mm
6	=	6"	150mm				

Body Style

Give body style code as follows:

401 = 1.2-3" NPT Outlet
4-14" Plain Outlet with Hood
401C = 1.2-3" Dual Body, NPT Outlet
4-14" Dual Body, Plain Outlet w/ Hood

End Connection

Give end connection code as follows:

T1 = Threaded Inlet NPT (1.2-4")
F1N = Flanged Inlet ASME 125/150 (1.2-4")
with Carbon Steel Nipple & Flange
F1 = Flanged Inlet ASME 125/150 (6-14") Cast

Body Material

Give body material code as follows:

DI = Ductile Iron (1.2-10")
CS = Carbon Steel (12-14")
S2 = 316 Stainless Steel

Cold Working Pressure

Give working pressure code as follows:

15 = 1.2-3" 3-15 psi DI Body Material & NBR Seat
75 = 4-14" 3-75 psi DI Body Material & NBR Seat
1.2-14" 3-75 psi DI Body Material & EPDM Seat
125 = 1.2-10" 11-200 psi, DI Body Material
150 = 12&14" 11-285 psi, CS Body Material

On Application

150 = 1.2-10" 11-250 psi, DI Body Material
1.2-14" 11-275 psi, S2 Body Material

Note: Working pressure is de-rated at temperatures over 100° F.

Trim Combination

Seating Surface

Give seating surface material code as follows:

NBR = Acrylonitrile-Butadiene
EPDM = Terpolymer of Ethylene Propylene & A Diene
FKM = Fluoro Rubber

Note: Needle Material will be the same as Seating Surface

Baffle Material

Give baffle material code as follows:

S2 = 316 Stainless Steel (1.2-3")
NA = Not Required (4-14")

Float Material

Give float material code as follows:

S2 = 316 Stainless Steel

Air Release Valve Orifice Size

Give air release code as follows if required:

Body Style 401C Only – Not required on other Body Style

L516 = 5/16" 3-15 psi, 2" Body Style 400
(Available with 15 CWP only)
R516 = 5/16" 11-50 psi 2" Body Style 400
R14 = 1/4" 11-75 psi 2" Body Style 400
R316 = 3/16" 11-150 psi 2" Body Style 400
R532 = 5/32" 11-300 psi 2" Body Style 400
L12 = 1/2" 3-15 psi 2" Body Style 450
(Available with 15 CWP only)
R12 = 1/2" 11-75 psi 2" Body Style 450
H12 = 1/2" 51-150 psi 2" Body Style 450
R716 = 7/16" 76-300 psi 2" Body Style 450

Note: Limiting Factor for Working Pressure is lowest Pressure Rating of end connection or orifice size.

Options

Give option code as follows if required:

DTR = DeZURIK Standard Certified Production
Hydrostatic Shell & Seat Test Report
FL = Flanged Outlets ASME 125/150, 1.2-3" are
CS Nipple & CI Flange with DI body material,
all others are the same as the body material.
HSB = Bug Screen for Hood, 304 Stainless Steel (4-14")
HSR = Rock Screen for Hood, 304 Stainless Steel (4-14")
SB16 = 316 Stainless Steel Bolting
TH = Threaded Outlet NPT (4-8"), same material as the body
— = Standard Coating on ASV-401 Valves is 2-part epoxy
on exterior. Standard coating on ASV-401C is fusion bonded
epoxy on interior and exterior.

Contact DeZURIK if alternate coatings are required.

Accessories

Give accessory code as follows if required:

BFK = Backflush Kit (200 psi maximum)
DAT = Double Acting Throttling Device (1.2-8")
4-8" must use TH option code
MRC = Mushroom Cap (1.2-3"). Not available with FL Option.

Ordering Example:


ASV,3,401,T1,DI,125,NBR-S2-S2*BFK-MRC

Dimensions

Air/Vacuum Valve Only, Body Style 401

Outlet Size	Inlet Size	A	B	C	D	E	F	G	H	J
1" 25mm	2"	16.38 416	7.00 178	4.50 114	3.50 89	3.00 76	0.94 24	—	—	1.69 43
2" 50mm	2"	19.75 502	9.63 245	5.63 143	4.06 103	4.06 103	1.69 43	—	—	1.69 43
3" 80mm	3"	19.75 502	9.63 245	5.69 145	4.06 103	4.06 103	1.88 48	—	—	1.88 48
4" 100mm	4"	29.63 753	11.00 279	5.75 146	4.81 122	4.56 116	—	27.63 702	28.00 711	2.06 52
6" 150mm	6"	32.44 824	13.63 346	7.00 178	5.88 149	5.88 149	—	30.25 768	30.50 775	—
8" 200mm	8"	36.50 927	17.25 438	9.00 229	7.88 200	7.88 200	—	33.63 854	34.13 867	—
10" 250mm	10"	40.75 1035	20.00 508	9.75 248	8.75 222	8.75 222	—	38.88 988	—	—
12" 300mm	12"	47.69 1211	25.00 635	11.69 297	10.50 267	10.50 267	—	43.88 1115	—	—
14" 350mm	14"	51.25 1302	29.00 737	13.50 343	13.00 330	13.00 330	—	48.38 1229	—	—

Inches
Millimeters

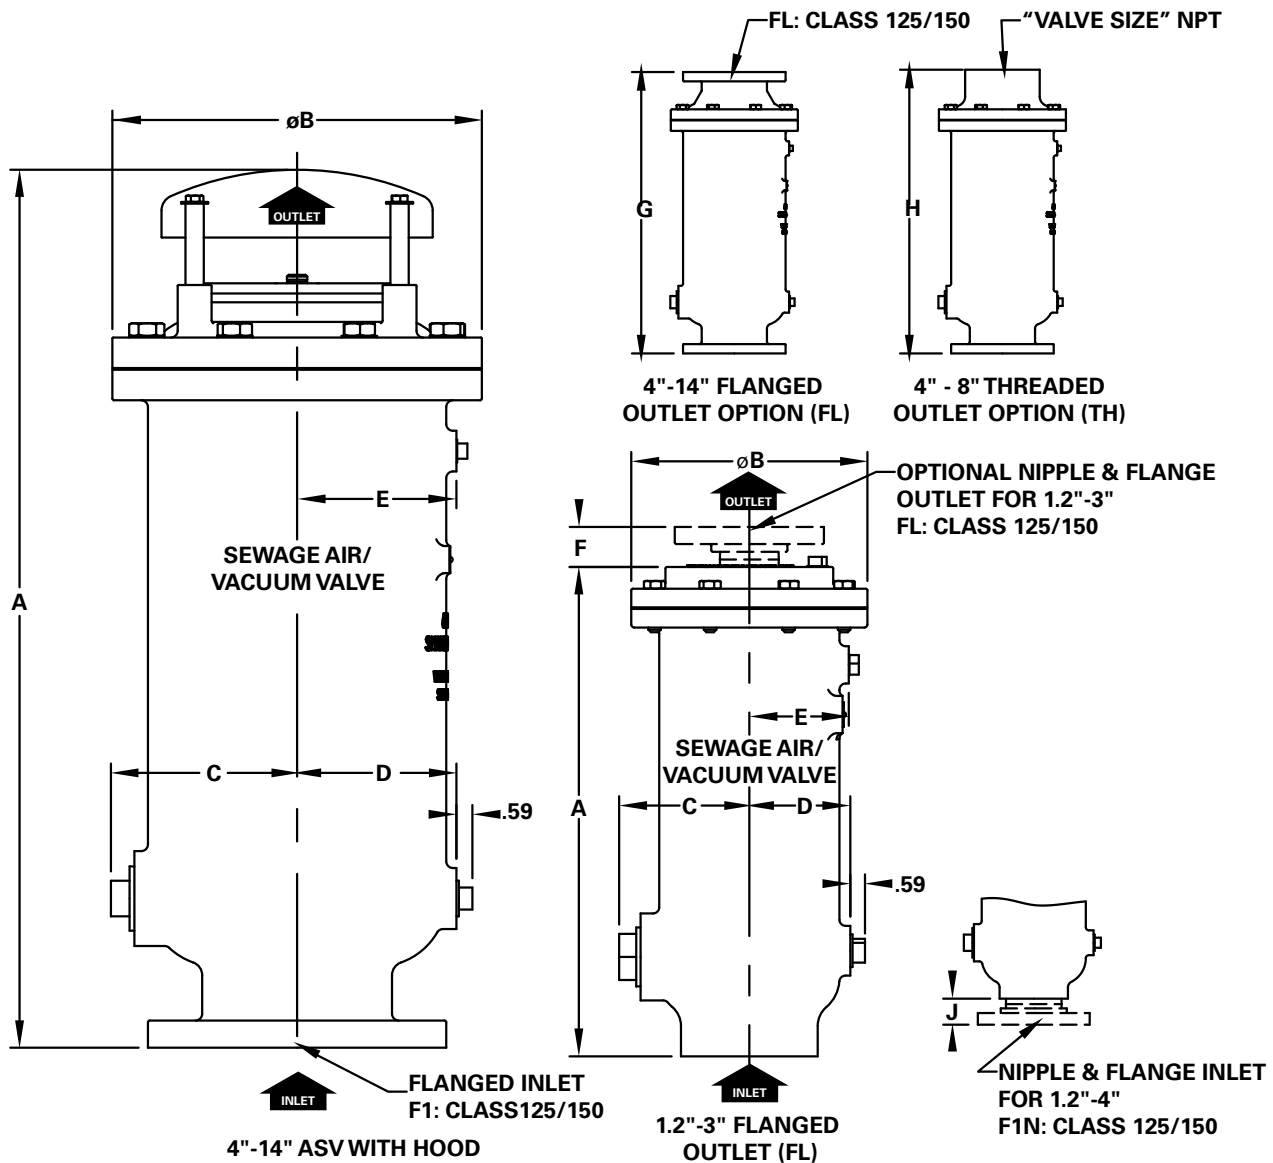


Dimensions

Dual Body Combination Air Valve, Body Style 401C, 1-3"

Outlet Size	Inlet Size	A	B		C	D	E	
			ASR-400	ASR-450			ASR-400	ASR-450
1" 25mm	2"	16.25 413	17.57 446	18.82 478	0.94 24	1.69 43	21.79 553	24.35 618
2" 50mm	2"	19.75 502	19.57 497	20.82 529	1.69 43	1.69 43	24.54 623	27.10 688
3" 80mm	3"	19.75 502	19.57 497	20.82 529	1.88 48	1.88 48	24.54 623	27.10 688

Inches
Millimeters

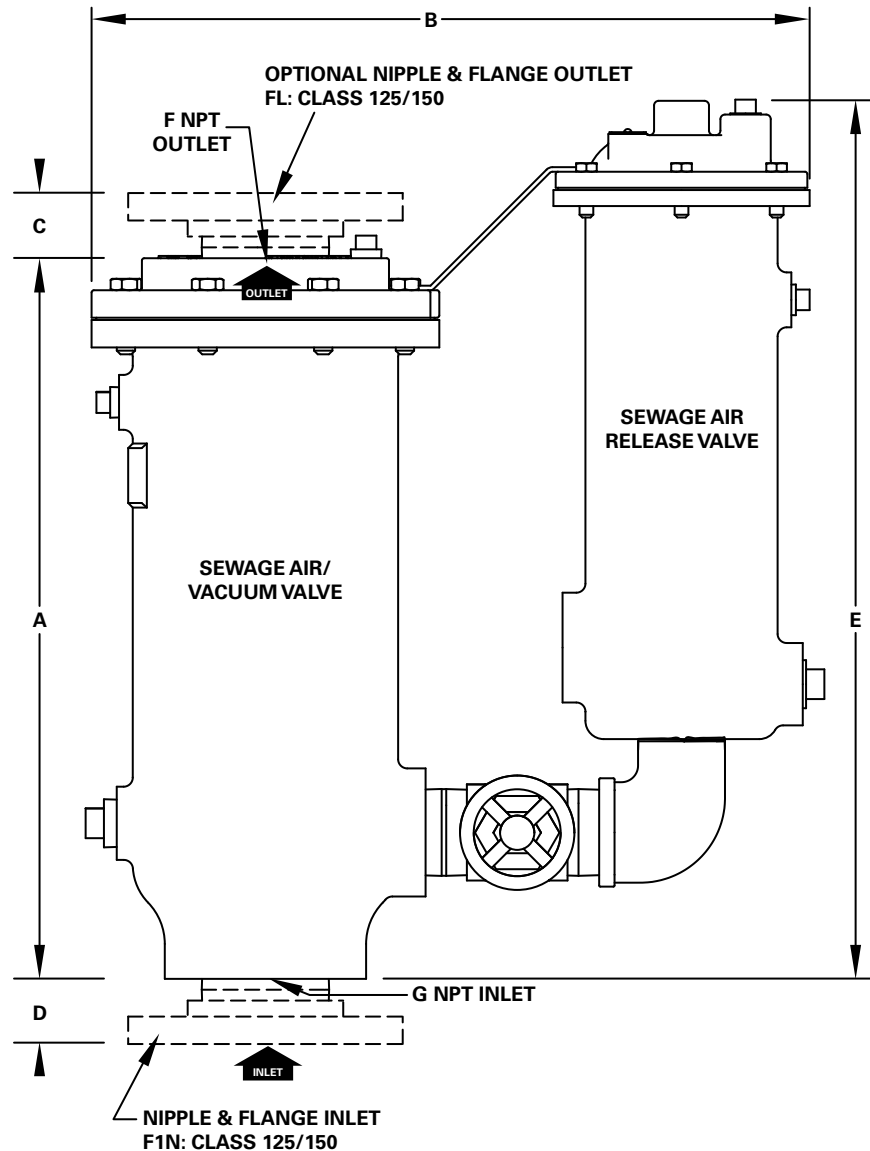


Dimensions

Dual Body Combination Air Valve, Body Style 401C, 4-8" Threaded Outlet

Outlet Size	Inlet Size	A		B	C		D
		ASR-400	ASR-450		ASR-400	ASR-450	
4" 100mm	4"	21.07 535	22.32 567	28.00 711	24.79 630	27.35 695	2.06 52
6" 150mm	6"	23.57 599	24.82 630	30.50 775	25.79 655	28.35 720	—
8" 200mm	8"	27.38 696	28.63 727	34.13 867	26.79 681	29.35 746	N/A

Inches
Millimeters


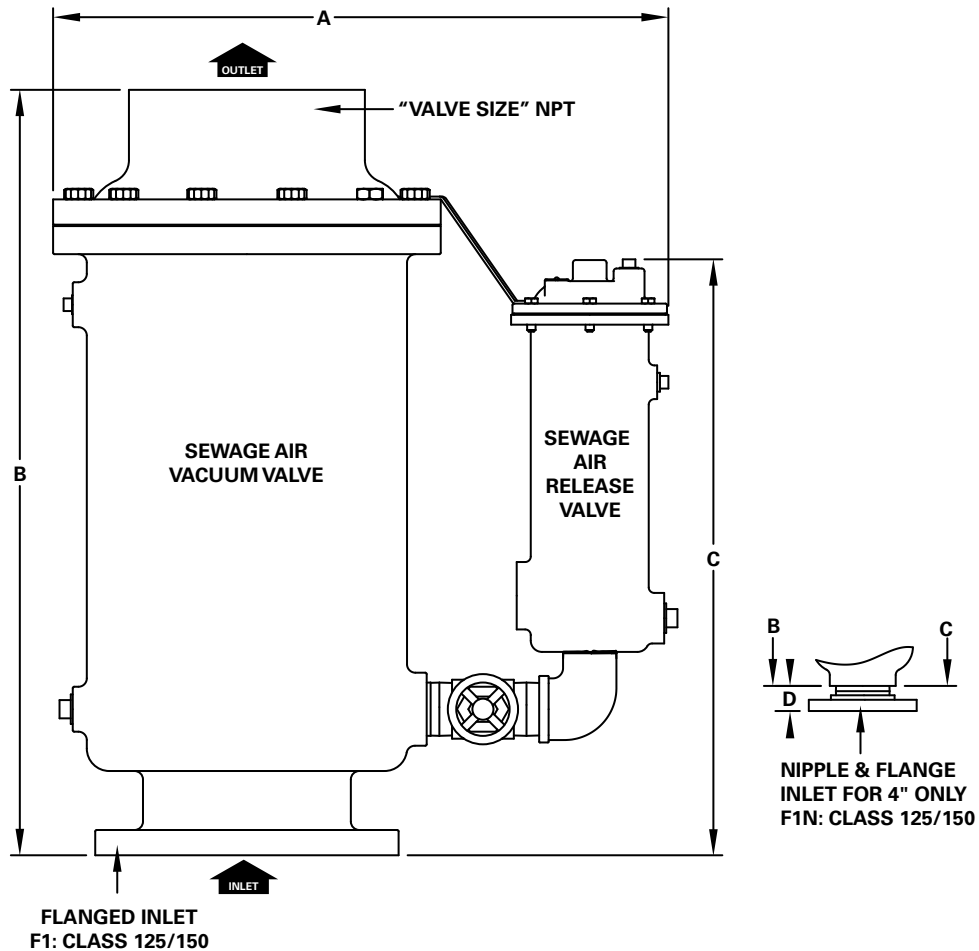


Dimensions

Body Style 401C, 4-14" Flanged Inlet (F1/F1N)

Outlet Size	Inlet Size	A		B		C		D
		ASR-400	ASR-450	Plain Outlet	Flanged Outlet	ASR-400	ASR-450	
4" 100mm	4"	21.07 535	22.32 567	29.63 753	27.63 702	24.79 630	27.35 695	2.06 52
6" 150mm	6"	23.57 599	24.82 630	32.44 824	30.25 768	25.79 655	28.35 720	—
8" 200mm	8"	27.38 695	28.63 727	36.50 927	33.63 854	26.79 680	29.35 745	—
10" 250mm	10"	29.51 750	30.76 781	40.75 1035	38.88 988	26.79 680	29.35 745	—
12" 300mm	12"	33.76 858	35.01 889	47.69 1211	43.88 1115	27.29 693	29.85 758	—
14" 350mm	14"	38.76 985	40.01 1016	51.25 1302	48.38 1229	28.04 712	30.60 777	—

Inches
Millimeters

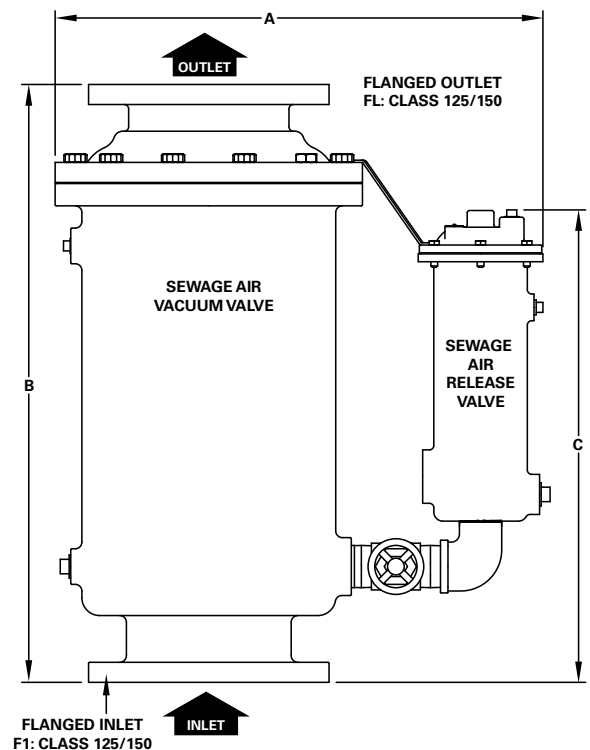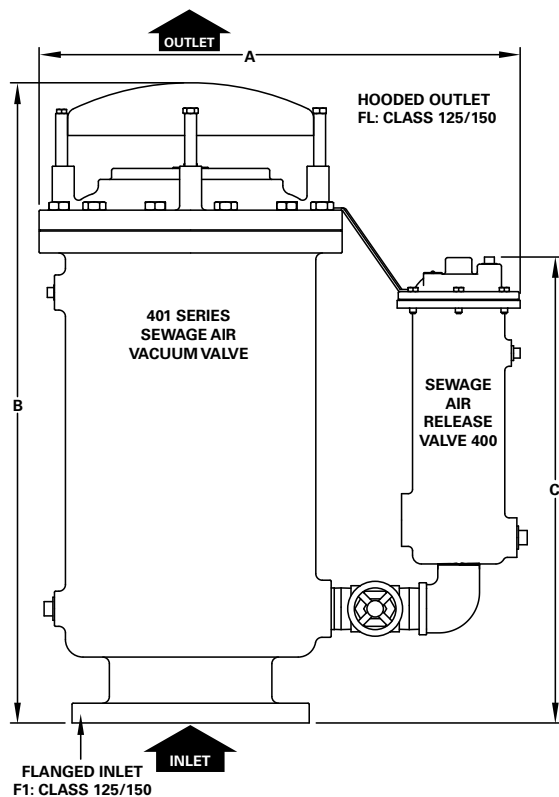

Sales and Service

For information about our worldwide locations, approvals, certifications and local representative:

Web Site: DeZURIK.com E-Mail: info@DeZURIK.com



250 Riverside Ave. N. Sartell, Minnesota 56377 • Phone: 320-259-2000 • Fax: 320-259-2227

DeZURIK, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing by DeZURIK, Inc. Certified drawings are available upon request.